



20ft Used Flush Folding Flatracks



CLASSIFICATION


For Sale: Used

Available via Triton's global network of supply locations.




FEATURES


- Built to carry heavy or out of gauge cargoes
- Heavy duty steel frames and thick plank floors
- Backed up by Triton's global network of supply locations and dedicated sales and support teams
- Great for specialized shipments of coiled steel, drums and machinery
- Many with flush folding end frames to allow for efficient stacking
- Available globally

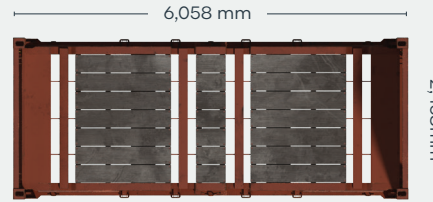

FLATRACK TOP



FLATRACK FRONT

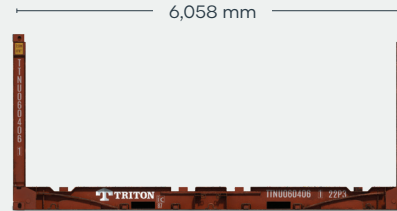

FLATRACK SIDE



FLATRACK REAR

DIMENSIONS (METRIC/IMPERIAL)

EXTERNAL DIMENSIONS

Length (Base bottom casting)	6,058 mm	19' 10.5"
Width (Base bottom casting)	2,438 mm	8' 0.0"
Height (End frame up)	2,591 mm	8' 6.0"
Height (End frame down)	370 mm	1' 2.6"

INTERNAL DIMENSIONS

Length (Between end panels)	6,038 mm	19' 9.7"
Width (Over bottom side rail)	2,194 mm	7' 2.4"
Height (Side rail to top castings)	2,233 mm	7' 3.9"

NOTE: The dimensions of containers correspond to ISO standards.

However, due to production tolerances, a difference in measurement is possible.

DISCLAIMER: Every effort is made to ensure this information is accurate, however Triton does not assume any liability for the accuracy of the information and content provided in marketing or information materials, or for the consequences resulting from using the information and content provided. Triton does not guarantee or claim that said information and content is exhaustive. Claims as to the exhaustive nature of said information and content are excluded. The information and content is only provided for advertising purposes and is non-binding. No explicit or implied warranties or guarantees are made. The container displayed only represents a sample of the entire fleet.

The following items are registered or unregistered service marks in the United States and/or foreign jurisdictions pursuant to applicable intellectual property law and are the property of Triton International Limited and its subsidiaries: Triton® and TAL®.

CAPACITY & WEIGHTS

Max Gross	34,000 kg	74,960 lbs
Payload	31,110 – 31,350 kg	65,150 – 65,570 lbs
Tare	2,650 – 2,890 kg	9,390 – 9,810 lbs