



TRITON

OUR SECTORS

Agricultural

Triton Containers are supplied in clean IIICL-6 condition and can be used for storage at origin or destination.



OUR SECTORS – AGRICULTURAL

Equipment that is built to last

We provide a safety net of equipment and additional operational flexibility ideal for the agriculture sector.

Triton Containers are supplied in a range of conditions subject to your needs, and can be used for cost-effective storage at origin or destination.

Weather and vermin resistant mobile containers

Triton Dry and Refrigerated Containers provide companies operating within the agriculture sector with an economical solution for securely storing equipment and critical supplies such as animal feed, agricultural grain, stock, fertilizers, pesticides, and machinery.

Alongside an array of tailored leasing options, we also sell containers in various colors and conditions globally. Triton used “Cargoworthy” units are ideal for securing valuable equipment and stock on-site. Alternatively, our “As-Is” condition units vary in quality but are typically suitable for field use.

We can also supply agricultural shippers with Shipper Owned Containers for international one-way use.

Triton Tank Containers

ISO Tank Containers have long been the go-to equipment type for safely transporting bulk liquid agricultural products around the globe. When used to transport cargo intermodally, they are more economical and produce less CO2 emissions than other methods. They are available globally with four different capacities, including 21000 liters, 25,000 liters, 26,000 liters, and 35,000 liters.

PLEASE NOTE: The following pages showcase a small sample of products in the Triton global inventory. We stock a wide range of products for lease and sale in various conditions. Get in touch with your local Triton representative for more information.



CLASSIFICATION

For Sale: New

Available via Triton's global network of supply locations.

10ft Dry Container



FEATURES

- Manufactured with rust resistant corten steel
- Secure and weatherproof, with vents to allow airflow
- Superior paint systems
- Incredibly versatile and suitable for customers to modify into a wide range of applications
- Advance orders in your preferred color (minimum volume required)
- Ideal for smaller domestic applications such as the construction industry
- Great options including 80 micron floor coating, lock boxes, waist high door locking handles
- Triton's industry leading new production testing and inspection criteria ensures the highest quality container
- Shipping costs can be minimized by loading 2x10' units joined together (using approved ISO certification method)
- Moved from factory to most major ports in the world
- Backed up by Triton's global network of supply locations and dedicated sales and support teams
- Available globally



CONTAINER ROOF



CONTAINER FRONT



CONTAINER SIDE



CONTAINER REAR

DIMENSIONS (METRIC/IMPERIAL)

EXTERNAL DIMENSIONS

Length	2,991 mm	9' 9.8"
Width	2,438 mm	8' 0.0"
Height	2,591 mm	8' 6.0"

INTERNAL DIMENSIONS

Length	2,831 mm	9' 3.5"
Width	2,352 mm	7' 8.6"
Height	2,393 mm	7' 10.2"

DOOR OPENING

Width	2,338 mm	7' 8.0"
Height	2,280 mm	7' 5.8"

CAPACITY & WEIGHTS

Inside Cubic Capacity	15.9 m ³	563 ft ³
Max Gross	10,160 kg	22,400 lbs
Payload	8,960 kg	19,755 lbs
Tare	1,200 kg	2,645 lbs

NOTE: The dimensions and door openings of all containers correspond to ISO standards. However, due to production tolerances, a difference in measurement is possible.

DISCLAIMER: Every effort is made to ensure this information is accurate, however Triton does not assume any liability for the accuracy of the information and content provided in marketing or information materials, or for the consequences resulting from using the information and content provided. Triton does not guarantee or claim that said information and content is exhaustive. Claims as to the exhaustive nature of said information and content are excluded. The information and content is only provided for advertising purposes and is non-binding. No explicit or implied warranties or guarantees are made. The container displayed only represents a sample of the entire fleet.

The following items are registered or unregistered service marks in the United States and/or foreign jurisdictions pursuant to applicable intellectual property law and are the property of Triton International Limited and its subsidiaries: Triton® and TAL®.



20ft Dry Container



CLASSIFICATION

Lease

Available via Triton's global network of supply locations.




FEATURES

- Manufactured with rust resistant corten steel
- Secure and weatherproof, with vents to allow airflow
- Resistant to damage and corrosion
- Superior paint systems
- Triton's industry leading new production testing and inspection criteria ensures the highest quality container
- Incredibly versatile
- Backed up by Triton's global network of supply locations and dedicated leasing and support teams
- Available globally
- IICL-6 repair criteria saves cost at off-hire
- Damage Protection Plan available to reduce costs and time at off-hire
- Flexible lease terms to meet your company needs




CONTAINER ROOF



CONTAINER FRONT



CONTAINER SIDE



CONTAINER REAR

DIMENSIONS (METRIC/IMPERIAL)

EXTERNAL DIMENSIONS

Length	6,058 mm	19' 10.5"
Width	2,438 mm	8' 0.0"
Height	2,591 mm	8' 6.0"

INTERNAL DIMENSIONS

Length	5,898 mm	19' 4.2"
Width	2,352 mm	7' 8.6"
Height	2,393 mm	7' 10.2"

DOOR OPENING

Width	2,340 mm	7' 8.1"
Height	2,280 mm	7' 5.8"

CAPACITY & WEIGHTS

Inside Cubic Capacity	33.2 m ³	1172 ft ³
Max Gross	30,480 kg	67,200 lbs
Payload	28,380 kg	62,570 lbs
Tare	2,100 kg	4,630 lbs

NOTE: The dimensions and door openings of all containers correspond to ISO standards. However, due to production tolerances, a difference in measurement is possible.

DISCLAIMER: Every effort is made to ensure this information is accurate, however Triton does not assume any liability for the accuracy of the information and content provided in marketing or information materials, or for the consequences resulting from using the information and content provided. Triton does not guarantee or claim that said information and content is exhaustive. Claims as to the exhaustive nature of said information and content are excluded. The information and content is only provided for advertising purposes and is non-binding. No explicit or implied warranties or guarantees are made. The container displayed only represents a sample of the entire fleet.

The following items are registered or unregistered service marks in the United States and/or foreign jurisdictions pursuant to applicable intellectual property law and are the property of Triton International Limited and its subsidiaries: Triton® and TAL®.



20ft Used Flush Folding Flatracks



CLASSIFICATION


For Sale: Used

Available via Triton's global network of supply locations.



FEATURES

- Built to carry heavy or out of gauge cargoes
- Heavy duty steel frames and thick plank floors
- Backed up by Triton's global network of supply locations and dedicated sales and support teams
- Great for specialized shipments of coiled steel, drums and machinery
- Many with flush folding end frames to allow for efficient stacking
- Available globally

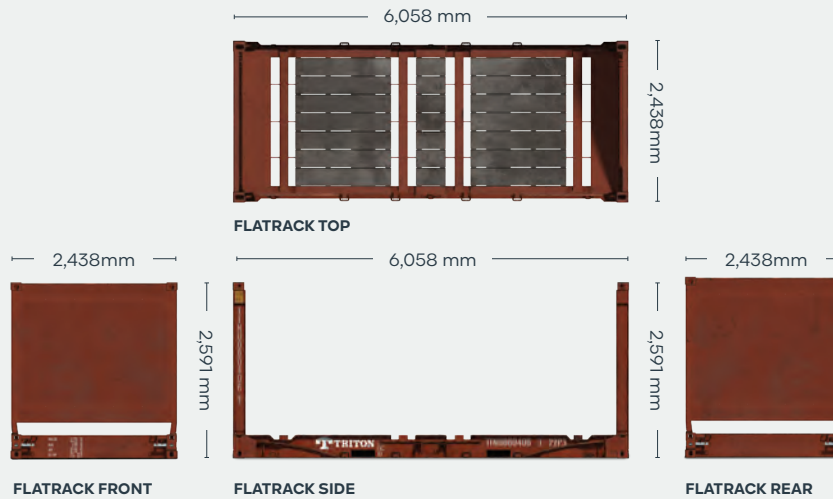

DIMENSIONS (METRIC/IMPERIAL)

EXTERNAL DIMENSIONS

Length (Base bottom casting)	6,058 mm	19' 10.5"
Width (Base bottom casting)	2,438 mm	8' 0.0"
Height (End frame up)	2,591 mm	8' 6.0"
Height (End frame down)	370 mm	1' 2.6"

INTERNAL DIMENSIONS

Length (Between end panels)	6,038 mm	19' 9.7"
Width (Over bottom side rail)	2,194 mm	7' 2.4"
Height (Side rail to top castings)	2,233 mm	7' 3.9"

CAPACITY & WEIGHTS

Max Gross	34,000 kg	74,960 lbs
Payload	31,110 – 31,350 kg 65,150 – 65,570 lbs	
Tare	2,650 – 2,890 kg 9,390 – 9,810 lbs	

NOTE: The dimensions of containers correspond to ISO standards.

However, due to production tolerances, a difference in measurement is possible.

DISCLAIMER: Every effort is made to ensure this information is accurate, however Triton does not assume any liability for the accuracy of the information and content provided in marketing or information materials, or for the consequences resulting from using the information and content provided. Triton does not guarantee or claim that said information and content is exhaustive. Claims as to the exhaustive nature of said information and content are excluded. The information and content is only provided for advertising purposes and is non-binding. No explicit or implied warranties or guarantees are made. The container displayed only represents a sample of the entire fleet.

The following items are registered or unregistered service marks in the United States and/or foreign jurisdictions pursuant to applicable intellectual property law and are the property of Triton International Limited and its subsidiaries: Triton® and TAL®.



CLASSIFICATION

Lease


Available via Triton's global network of supply locations.

40ft Flush Folding Flatracks



FEATURES

- Built to carry heavy or oversized cargoes
- Great for specialized shipments of steel, pipes, drums and machinery
- Forklift pockets for easy empty handling
- Heavy duty steel frames and thick plank floors and lashing rings all around
- With flush folding end frames to allow for efficient stacking and repositioning
- Triton's industry leading new production testing and inspection criteria ensures the highest quality container
- Available in the high demand hub ports
- Backed up by Triton's global network of supply locations and dedicated leasing and support teams
- Flexible lease terms to meet your company needs

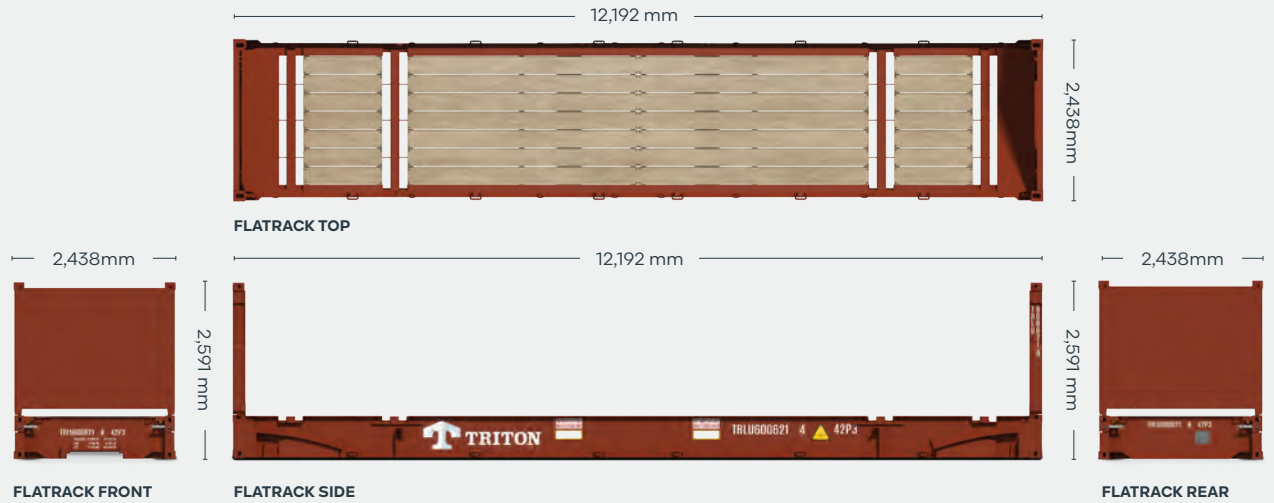

DIMENSIONS (METRIC/IMPERIAL)

EXTERNAL DIMENSIONS

Length (Base bottom casting)	12,192 mm	40' 0.0"
Width (Base bottom casting)	2,438 mm	8' 0.0"
Height (End frame up)	2,591 mm	8' 6.0"
Height (End frame down)	648 mm	2' 1.5"

INTERNAL DIMENSIONS

Length (Between end panels)	12,182 mm	39' 11.6"
Width (Over bottom side rail)	2,374 mm	7' 9.5"
Height (Side rail to top castings)	1,959 mm	6' 5.1"

CAPACITY & WEIGHTS

Max Gross	52,500 kg	115,740 lbs
Payload	47,370 kg	104,430 lbs
Tare	5,130 kg	11,310 lbs

NOTE: The dimensions of containers correspond to ISO standards.

However, due to production tolerances, a difference in measurement is possible.

DISCLAIMER: Every effort is made to ensure this information is accurate, however Triton does not assume any liability for the accuracy of the information and content provided in marketing or information materials, or for the consequences resulting from using the information and content provided. Triton does not guarantee or claim that said information and content is exhaustive. Claims as to the exhaustive nature of said information and content are excluded. The information and content is only provided for advertising purposes and is non-binding. No explicit or implied warranties or guarantees are made. The container displayed only represents a sample of the entire fleet.

The following items are registered or unregistered service marks in the United States and/or foreign jurisdictions pursuant to applicable intellectual property law and are the property of Triton International Limited and its subsidiaries: Triton® and TAL®.



ISO Fluid Tank Container



CLASSIFICATION


Lease

Available via Triton's global network of supply locations.



FEATURES

- UN portable tank: Type T11 and T14 available
- Capacities ranging from 21000l to 35000l
- Approved for ADR/RID/IMDG transportation
- Suitable for the carriage of most bulk liquids
- General specs include a high quality stainless steel tank barrel
- Full frame type design with B-style walkway
- Internationally recognized fittings
- Insulation with steam heating capability
- Rigorous quality control of our 3rd party production facilities
- Backed up by Triton's global network of supply locations and dedicated leasing and support teams
- Available globally
- Flexible lease terms to meet your company needs

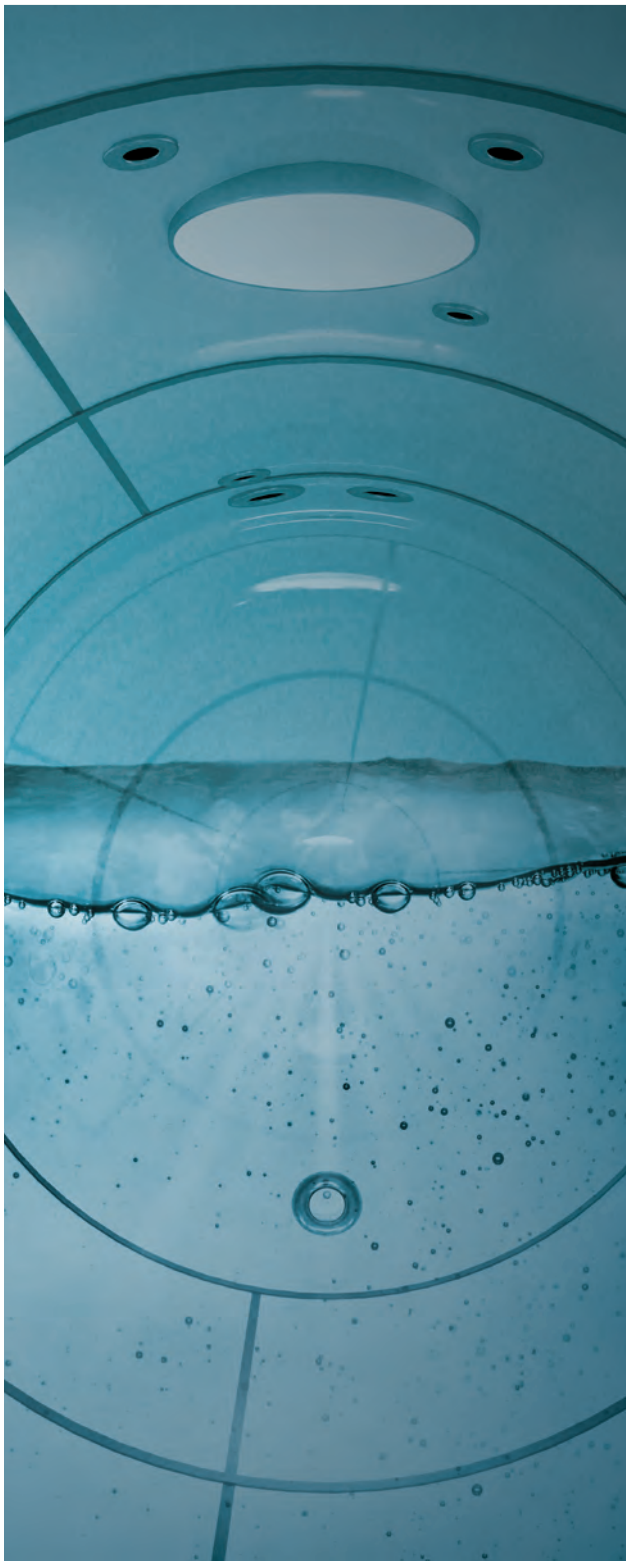

TANK TOP



TANK FRONT

TANK SIDE

TANK REAR

DIMENSIONS (METRIC/IMPERIAL)

FRAME DIMENSIONS (20' Equivalent)

Length	6,058 mm	19' 10.5"
Width	2,438 mm	8' 0.0"
Height	2,591 mm	8' 6.0"

WEIGHT, PRESSURE & TEMPERATURE

Maximum Gross Weight	36,000 kg
Tare Weight	3,710 kg
Payload	32,290 kg
Maximum Allowable Working Pressure	4.00 bar
Design Temperature (frame & tank)	-40°C to +130°C

OPTIONS

AVAILABLE ISO TANKS T11 TYPES

20ft	21,000 litre
20ft	25,000 litre
20ft	26,000 litre

AVAILABLE NON-ISO T11 TYPES

7.82m Swap Body	35,000 litre
-----------------	--------------

NOTE: The dimensions and door openings of all containers correspond to ISO standards. However, due to production tolerances, a difference in measurement is possible.

DISCLAIMER: Every effort is made to ensure this information is accurate, however Triton does not assume any liability for the accuracy of the information and content provided in marketing or information materials, or for the consequences resulting from using the information and content provided. Triton does not guarantee or claim that said information and content is exhaustive. Claims as to the exhaustive nature of said information and content are excluded. The information and content is only provided for advertising purposes and is non-binding. No explicit or implied warranties or guarantees are made. The container displayed only represents a sample of the entire fleet.

The following items are registered or unregistered service marks in the United States and/or foreign jurisdictions pursuant to applicable intellectual property law and are the property of Triton International Limited and its subsidiaries: Triton® and TAL®.



CLASSIFICATION

For Sale: Used


Available via Triton's global network of supply locations.

Used ISO Fluid Tank Container



FEATURES

- UN Portable Tank: Type T11 and T14
- Capacities ranging from 21000l to 35000l
- Approved for ADR/RID/IMDG transportation
- Suitable for the carriage of most bulk liquids
- General specs include a high quality stainless steel tank barrel
- Full frame type design with B-style walkway
- Internationally recognized fittings
- Insulation with steam heating capability
- Rigorous quality control of our 3rd party production facilities
- Backed up by Triton's global network of supply locations and dedicated sales and support teams
- Available globally in all hub locations

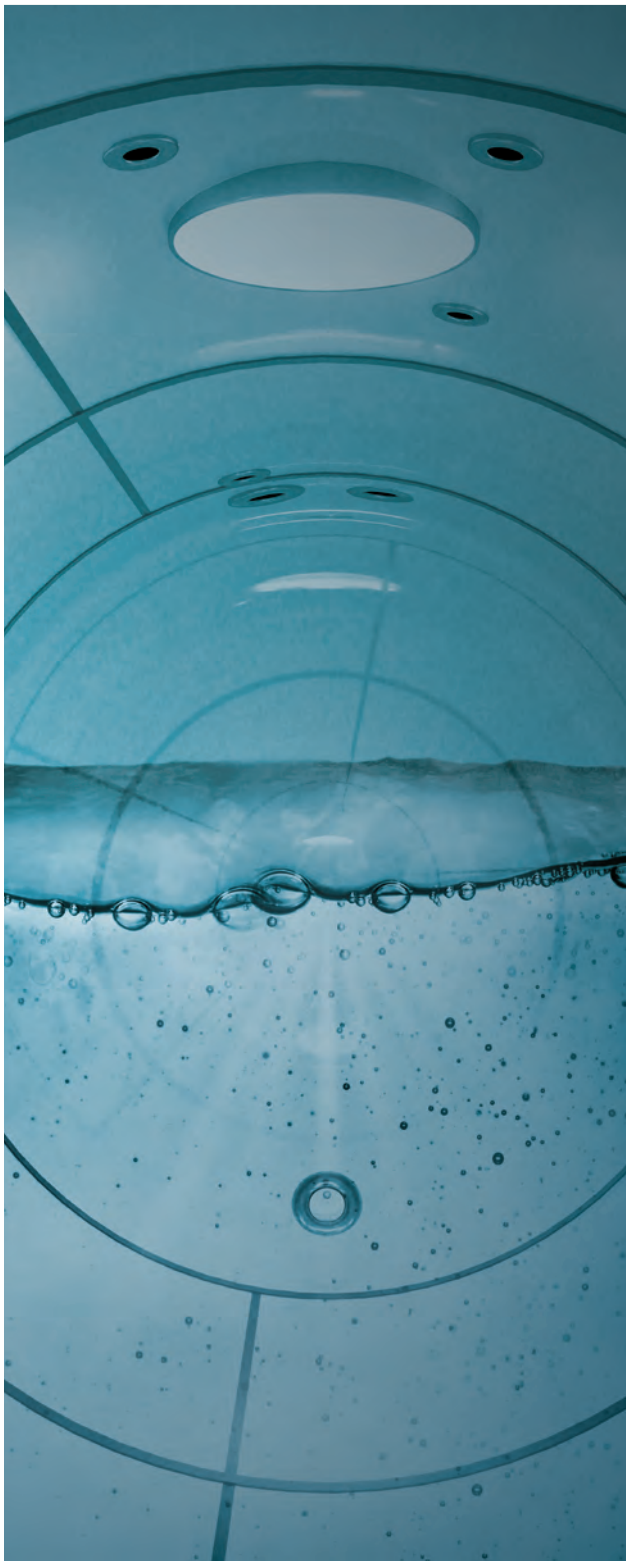

TANK TOP



TANK FRONT

TANK SIDE

TANK REAR

DIMENSIONS (METRIC/IMPERIAL)

FRAME DIMENSIONS (20' Equivalent)

Length	6,058 mm	19' 10.5"
Width	2,438 mm	8' 0.0"
Height	2,591 mm	8' 6.0"

WEIGHT, PRESSURE & TEMPERATURE

Maximum Gross Weight	36,000 kg
Tare Weight	3,500–3,910 kg
Payload	32,090–32,500 kg
Maximum Allowable Working Pressure	4.00 bar
Design Temperature (frame & tank)	-40°C to +130°C

OPTIONS

AVAILABLE ISO TANKS T11 TYPES

20ft	21,000 litre
20ft	25,000 litre
20ft	26,000 litre

AVAILABLE NON-ISO T11 TYPES

7.82m Swap Body	35,000 litre
-----------------	--------------

NOTE: The dimensions and door openings of all containers correspond to ISO standards. However, due to production tolerances, a difference in measurement is possible.

DISCLAIMER: Every effort is made to ensure this information is accurate, however Triton does not assume any liability for the accuracy of the information and content provided in marketing or information materials, or for the consequences resulting from using the information and content provided. Triton does not guarantee or claim that said information and content is exhaustive. Claims as to the exhaustive nature of said information and content are excluded. The information and content is only provided for advertising purposes and is non-binding. No explicit or implied warranties or guarantees are made. The container displayed only represents a sample of the entire fleet.

The following items are registered or unregistered service marks in the United States and/or foreign jurisdictions pursuant to applicable intellectual property law and are the property of Triton International Limited and its subsidiaries: Triton® and TAL®.

HERE. THERE. EVERYWHERE

We supply the world

Triton is the largest lessor of intermodal containers in the world with over 7 million TEU of containers. Our services are available in 89 countries around the globe. So, no matter where you need containers, we'll have them nearby. To find your nearest Triton Container Sales manager visit www.tritoncontainer.com.



**Global inventory of
cargoworthy containers
for lease and sale.**



**Unrivalled container
supply at competitive
prices.**



**Outstanding and
highly responsive
customer services.**



**Global network of 20 offices
and 3 independent agencies
across 16 countries.**



**Equipment
built to the
highest quality.**



**Our size, strength and reliability
make us the go-to supplier of
intermodal shipping containers.**



TRITON

We're the biggest for a reason, contact our friendly experts and experience Triton's world-leading service and cost savings today. Imagine what we can do together.

www.tritoncontainer.com